
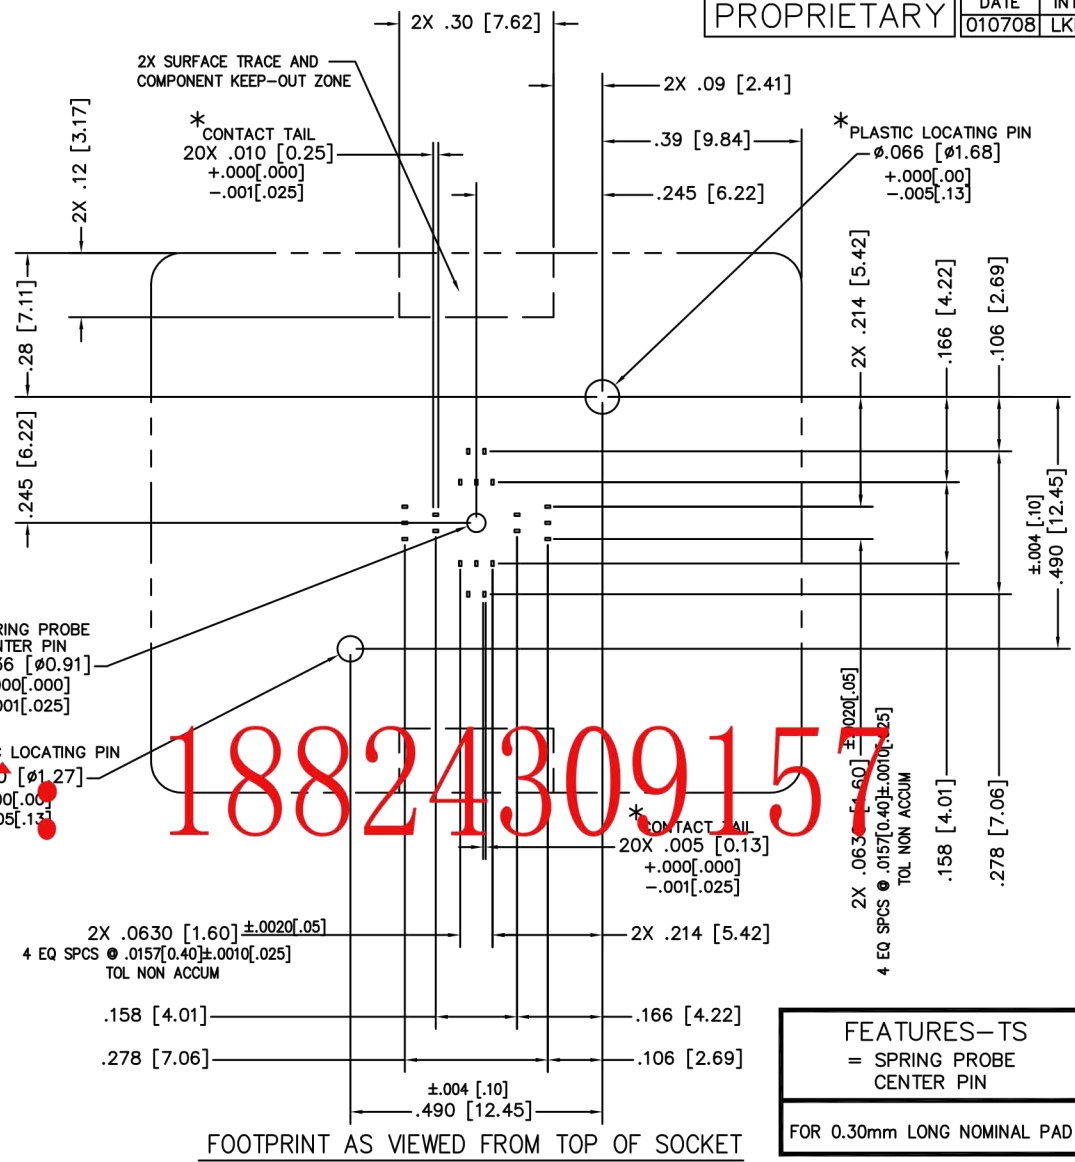


NOTE : * DIMENSION OF SOCKET FEATURES SHOWN.
BOARD DESIGNER SHOULD SELECT APPROPRIATE HOLE
SIZES TO PROVIDE A SLIP FIT FOR THESE FEATURES.

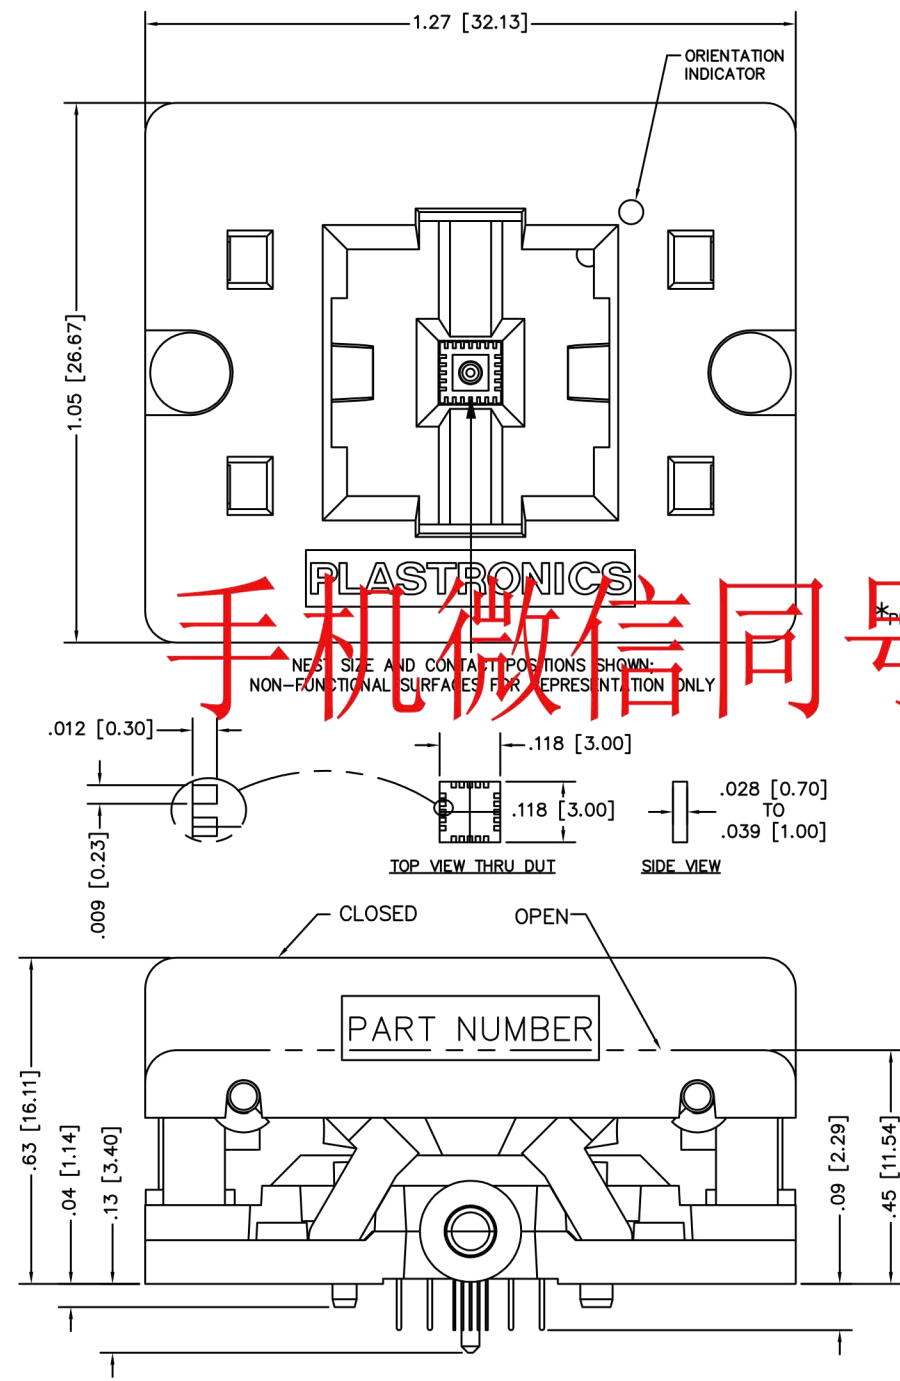

THIS DRAWING IS SUBJECT TO CHANGE WITHOUT NOTICE. PLEASE REQUEST A CURRENT DRAWING WHEN LAYING OUT BOARDS.

FEATURES-TS
= SPRING PROBE
CENTER PIN

FOR 0.30mm LONG NOMINAL PAD

DEPOPULATED FROM :
24LQ40TS13030

SOCKET PART NUMBER
20LQ40TS13030

UNLESS OTHERWISE SPECIFIED . XX = ±.003 SURFACE .XX = ±.010 FINISH .X = ±.020 ANGLE = ±1 ALL DIM ARE IN INCHES ALL DIM (XX) ARE MILLIMETERS REMOVE ALL BURRS AND SHARP EDGES DIM LIMITS APPLY BEFORE PROCESSES HOLE TOLERANCES .0135 THRU .125 = +.004 -.001 .128 THRU .250 = +.005 -.001 .251 THRU .500 = +.006 -.001 .501 THRU .750 = +.008 -.001 .751 THRU 1.00 = +.010 -.001 1.001 THRU 2.00 = +.012 -.001	MATERIAL —	PROCESSES —		SIZE C	COD NO.	DWG NO.	REV	SH	
						20LQ40TS13030	—	—	
				TITLE OPENTOP DUAL LATCH QFN SOCKET; 3 X 3mm, 0.40mm-PITCH; 20 CONTACTS PLUS SPRING PROBE CENTER PIN; THRU-HOLE					
		SCALE	NONE	DATE					
		DWN	LKI	010708					
		CHK							
		ENGR							
		APPVD							
 2601 TEXAS DRIVE IRVING, TX. 75062									