

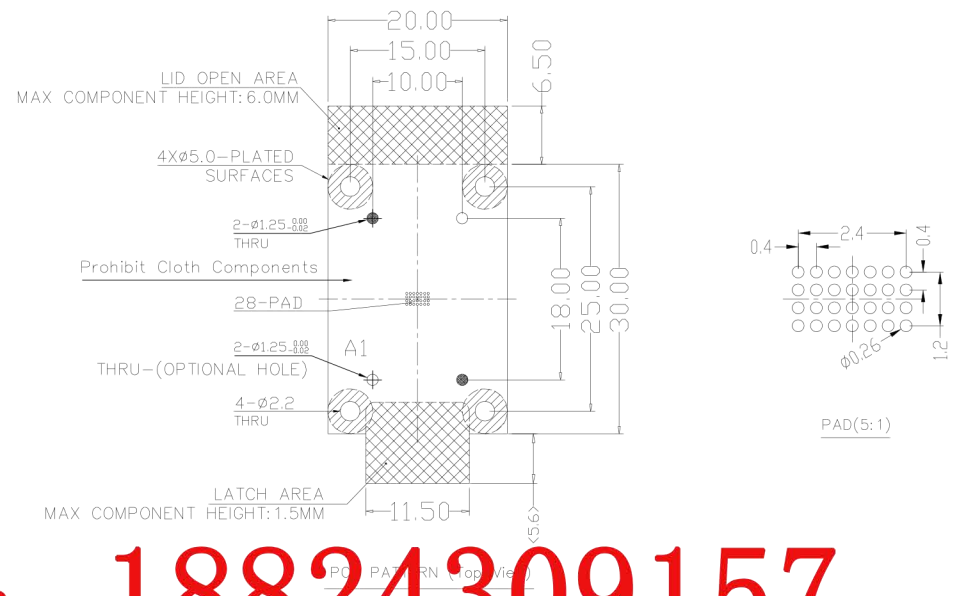
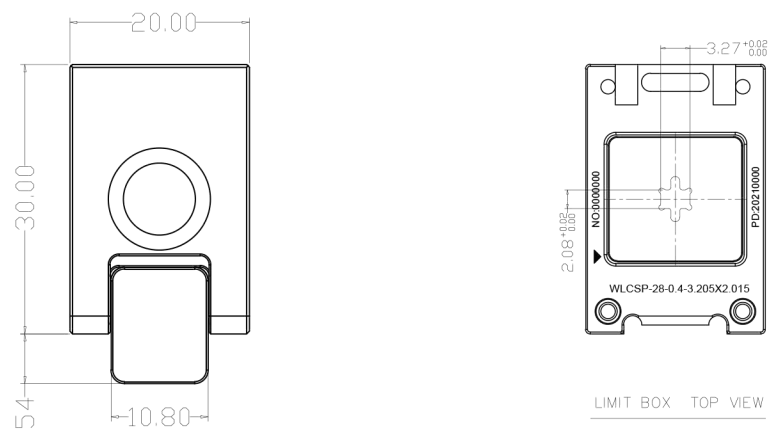
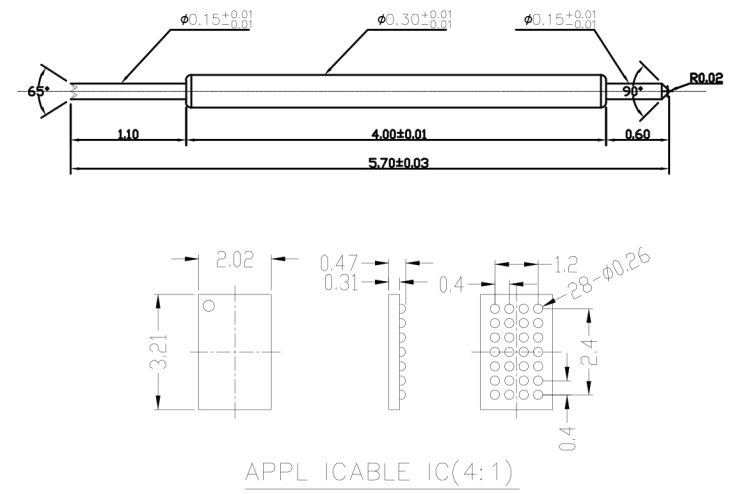


NOTES: (UNLESS OTHERWISE SPECIFIED)
1. ALL DIMENSIONS ARE SYMMETRICAL TO THE CENTER LINES.
2. WE RECOMMEND USING GOLD PLATED PADS (PLATED WITH HARD GOLD 0.0013MM[0.05 MICRO INCHES] (MIN), OVER NICKEL 0.005MM[0.2 MICRO INCHES](MIN), KNOOP HARDNESS 130~200), ON THE BASIS OF PREVENTING PCB PAD WORN OUT OR DAMAGED BY TEST SOCKET. OR PLEASE CONSULT WITH PCB SUPPLIER FOR PLATING THICKNESS SPECIFICATION.
3. FOR SYSTEM BOARD(SLT)/SOCKET BASE MOUNTING, QTY 4, THROUGH HOLES WITH PLATED PAD (FOR M2.0 ISO SCREWS).
4. FOR LOAD BOARD(ATE)/SOCKET BASE MOUNTING, INSTALL QTY 4;

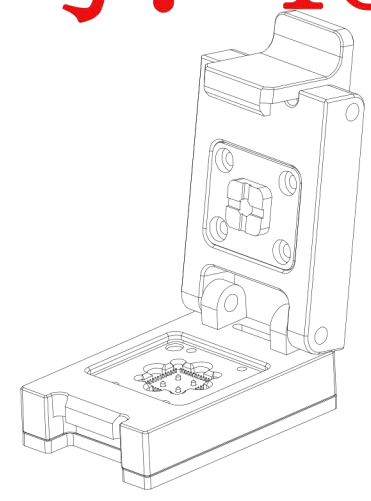

手机微信同号: 18824309157

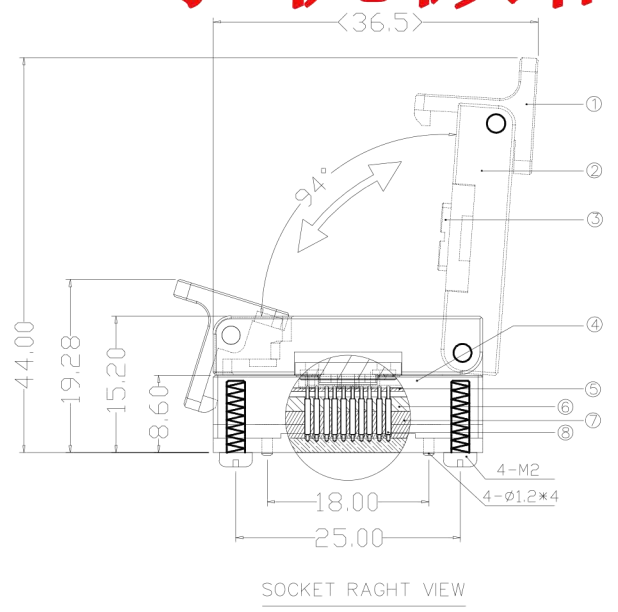

⑧	探针	COPPER	28	△C						
⑦	下针板	PPS	1	△B						
⑥	上针板	PPS	1	△A						
⑤	浮板	PPS	1	版本	更改事项	日期	更改者	名称	测试座	
④	底座	AL6061	1	更改记录				型号	HYDZ-20210611-WLCSP-28-0.4-3.205X2.015	
③	压块	BRASS	1	审批		日期		比例	1:1	单位
②	上盖	AL6061	1	设计	CQY	日期	20210611	页面	1-1	版本
①	手扣	AL6061	1							V1.0
序号	名称	材质	数量							