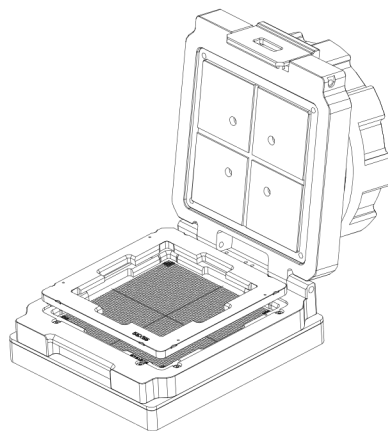
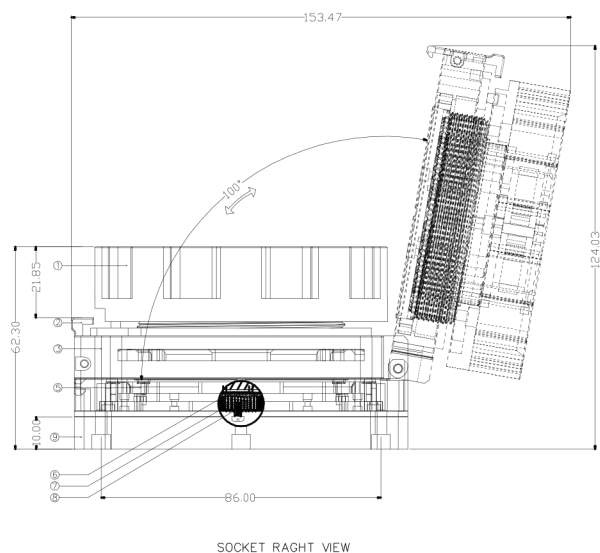
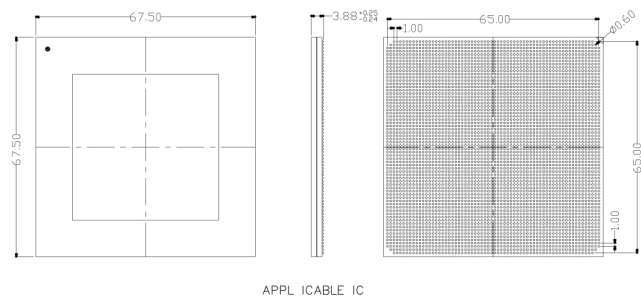

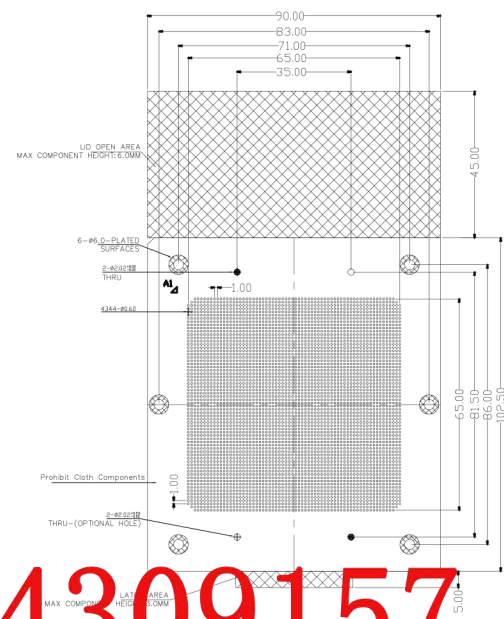
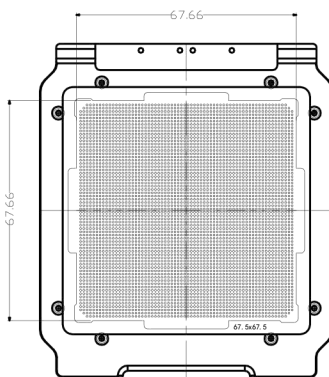
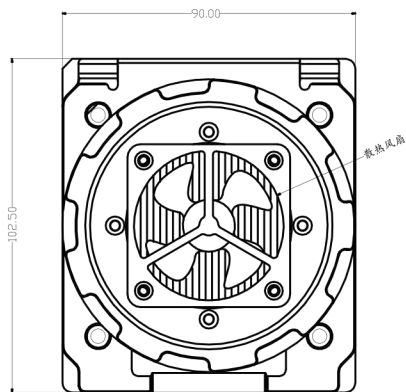


1. ALL DIMENSIONS ARE SYMMETRICAL TO THE CENTER LINES.
2. WE RECOMMEND USING GOLD PLATED PADS (PLATED WITH HARD GOLD 0.0013MM[0.05 MICRO INCHES] (MIN).
OVER NICKEL 0.005MM[0.2 MICRO INCHES](MIN), KNOOP HARDNESS 130-200), ON THE BASIS OF PREVENTING PCB PAD
WORN OUT OR DAMAGED BY TEST SOCKET.OR PLEASE CONSULT WITH PCB SUPPLIER FOR PLATING THICKNESS SPECIFICATION.
3.FOR SYSTEM BOARD(SLT)/SOCKET BASE MOUNTING, QTY 4,THROUGH HOLES
WITH PLATED PAD (FOR M2.0 ISO SCREWS).
4.FOR LOAD BOARD(ATE)/SOCKET BASE MOUNTING, INSTALL QTY 4;

[illegible]