NOTES: (UNLESS OTHERWISE SPECIFIED)
1. ALL DIMENSIONS ARE SYMMETRICAL TO THE CENTER LINES.
2. WE RECOMMEND USING GOLD PLATED PADS (PLATED WITH HARD GOLD 0.0013MM[0.05 MICRO INCHES] (MIN), OVER NICKEL 0.005MM[0.2 MICRO INCHES](MIN), KNOOP HARDNESS 130~200), ON THE BASIS OF PREVENTING PCB PAD WORN OUT OR DAMAGED BY TEST SOCKET,OR PLEASE CONSULT WITH PCB SUPPLIER FOR PLATING THICKNESS SPECIFICATION.
3.FOR SYSTEM BOARD(SLT)/SOCKET BASE MOUNTING, QTY 4,THROUGH HOLES WITH PLATED PAD (FOR M2.0 ISO SCREWS).
4.FOR LOAD BOARD(ATE)/SOCKET BASE MOUNTING, INSTALL QTY 4;

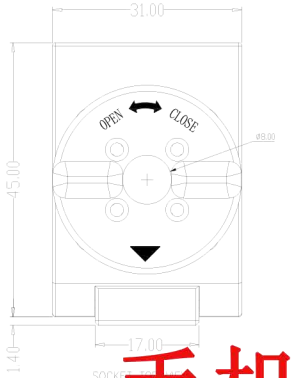





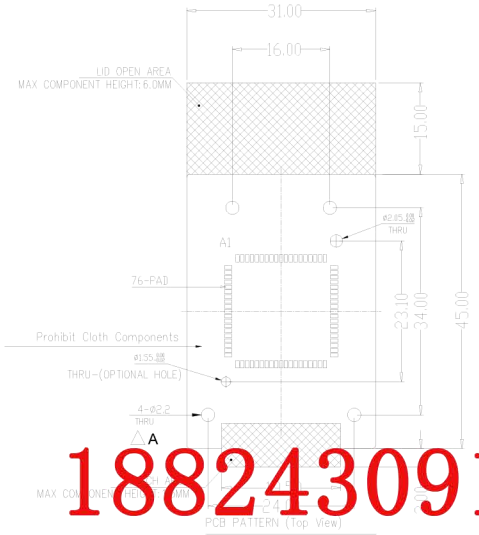


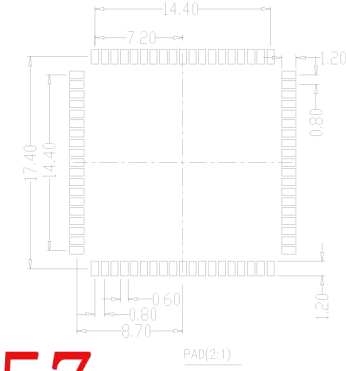


手机微信同号：18824309157

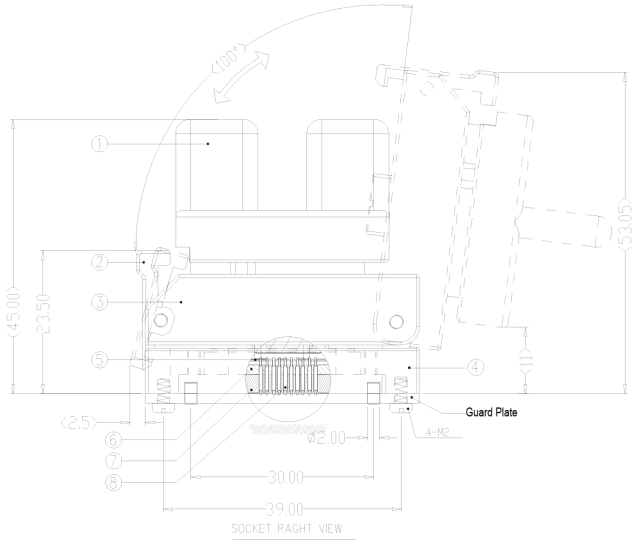


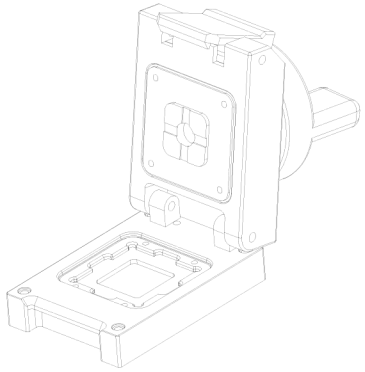

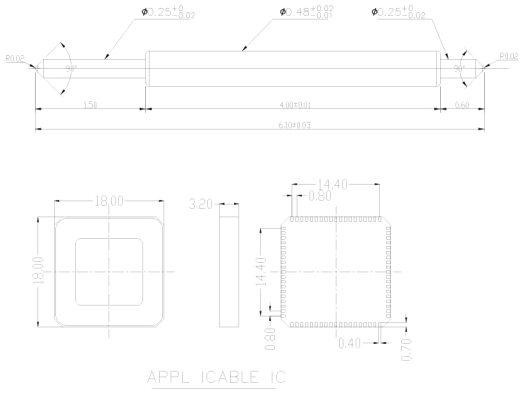


| 序号 | 名称 | 材质 | 数量 |
|---|---|---|---|
| ⑧ | 探针 | COPPER | 76 |
| ⑦ | 下针板 | 工程材料 | 1 |
| ⑥ | 上针板 | 工程材料 | 1 |
| ⑤ | 浮板 | 工程材料 | 1 |
| ④ | 底座 | AL6061 | 1 |
| ③ | 上盖 | AL6061 | 1 |
| ② | 手扣 | AL6061 | 1 |
| ① | 旋盖 | AL6061 | 1 |

| | | | | | | | |
|---|---|---|---|---|---|---|---|
| △C | | | | | | | |
| △B | | | | | | | |
| △A | | | | | | | |
| 版本 | 更改定位孔 6/21 | | CQY | 名称 | 测试座 | | |
| 更改记录 | | | | 型号 | HYDZ-20210604-LCC76-0.8-18X18X3.2 | | |
| 审批 | | 日期 | | 比例 | 1:1 | 单位 | mm |
| 设计 | CQY | 日期 | 20210604 | 页面 | 1—1 | 版本 | V1.0 |