NOTES: (UNLESS OTHERWISE SPECIFIED)

1. ALL DIMENSIONS ARE SYMMETRICAL TO THE CENTER LINES.
2. WE RECOMMEND USING GOLD PLATED PADS (PLATED WITH HARD GOLD 0.0013MM[0.05 MICRO INCHES] (MIN), OVER NICKEL 0.005MM[0.2 MICRO INCHES](MIN), KNOOP HARDNESS 130~200), ON THE BASIS OF PREVENTING PCB PAD WORN OUT OR DAMAGED BY TEST SOCKET.OR PLEASE CONSULT WITH PCB SUPPLIER FOR PLATING THICKNESS SPECIFICATION.
3. FOR SYSTEM BOARD(SLT)/SOCKET BASE MOUNTING, QTY 4,THROUGH HOLES WITH PLATED PAD (FOR M2.0 ISO SCREWS).
4. FOR LOAD BOARD(ATE)/SOCKET BASE MOUNTING, INSTALL QTY 4;

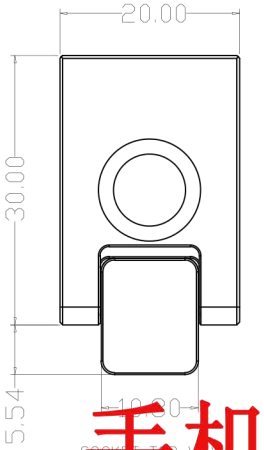



LIMIT BOX TOP VIEW

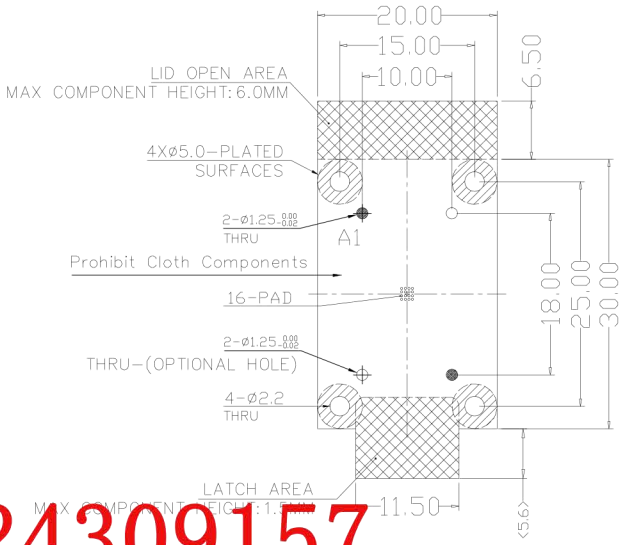

PCB PATTERN (Top View)



PAD(7:1)

手机微信同号：18824309157

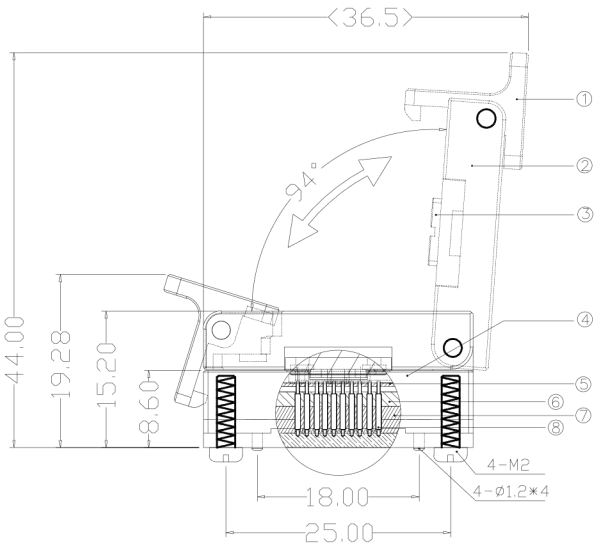

SOCKET RAGHT VIEW

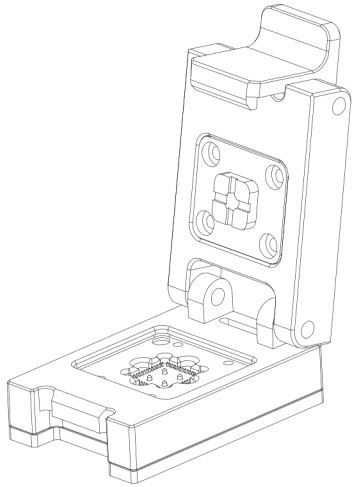

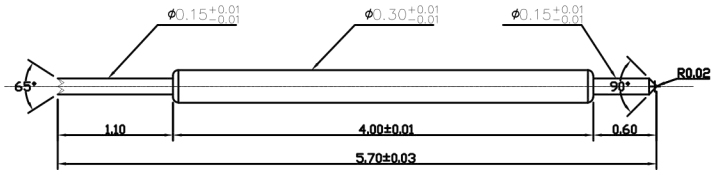

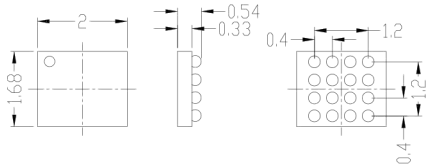

APPL ICABLE IC(4:1)

序号	名称	材质	数量
⑧	探针	COPPER	16
⑦	下针板	PPS	1
⑥	上针板	PPS	1
⑤	浮板	PPS	1
④	底座	AL6061	1
③	压块	BRASS	1
②	上盖	AL6061	1
①	手扣	AL6061	1

版本	更改事项	日期	更改者
△C			
△B			
△A			

更改记录

审批		日期		名称	测试座		
设计	CQY	日期	20210611	型号	20210611-WLCSP16-0.4-2X1.68x0.535		
				比例	1:1	单位	mm
				页面	1—1	版本	V1.0