

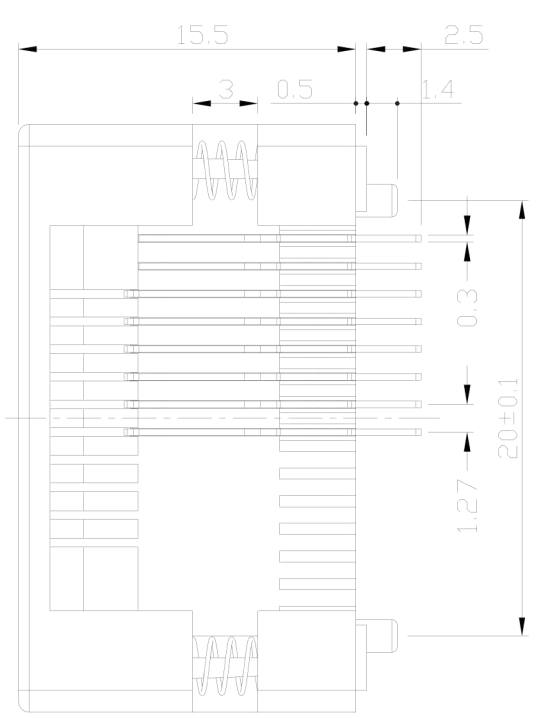


REVISION	DESCRIPTION	CHECK	APP	DATE	REV. NOTICE. NO
1					
2					
3					

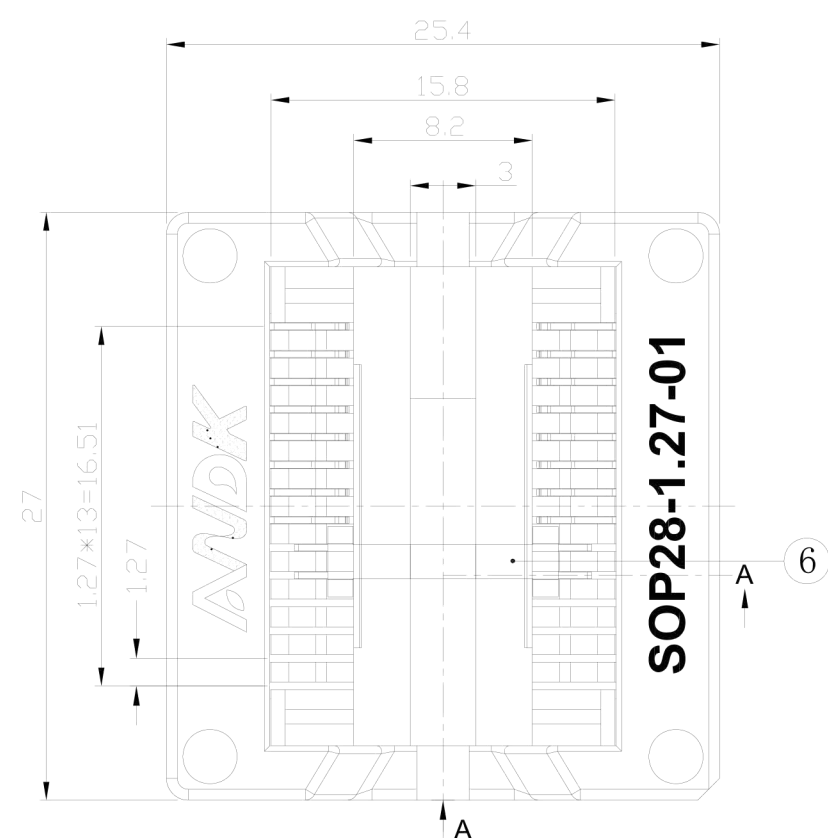



PCB PATTERN (TOP VIEW)

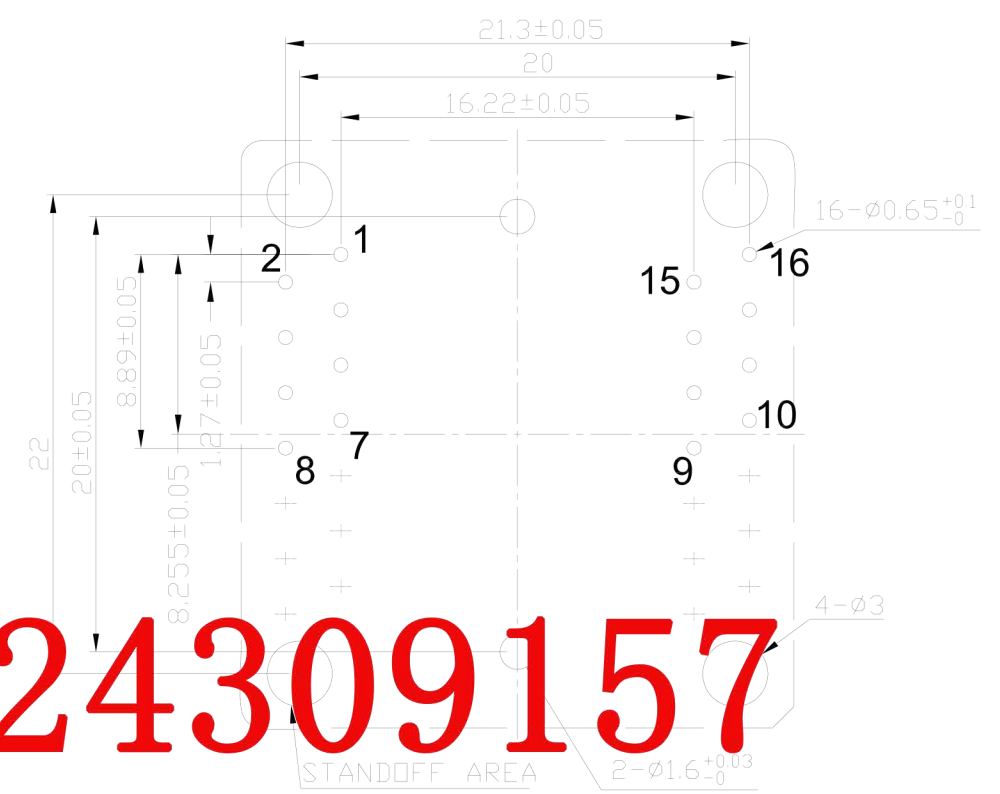

手机微信同号: 18824309157



CONTACT TIP DETAIL

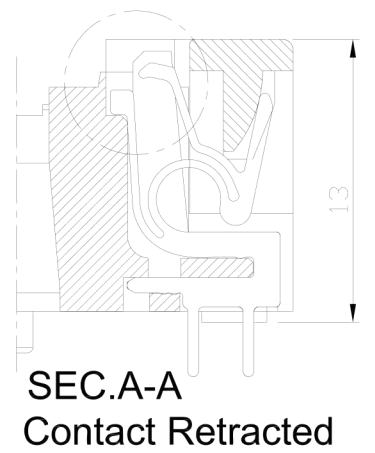
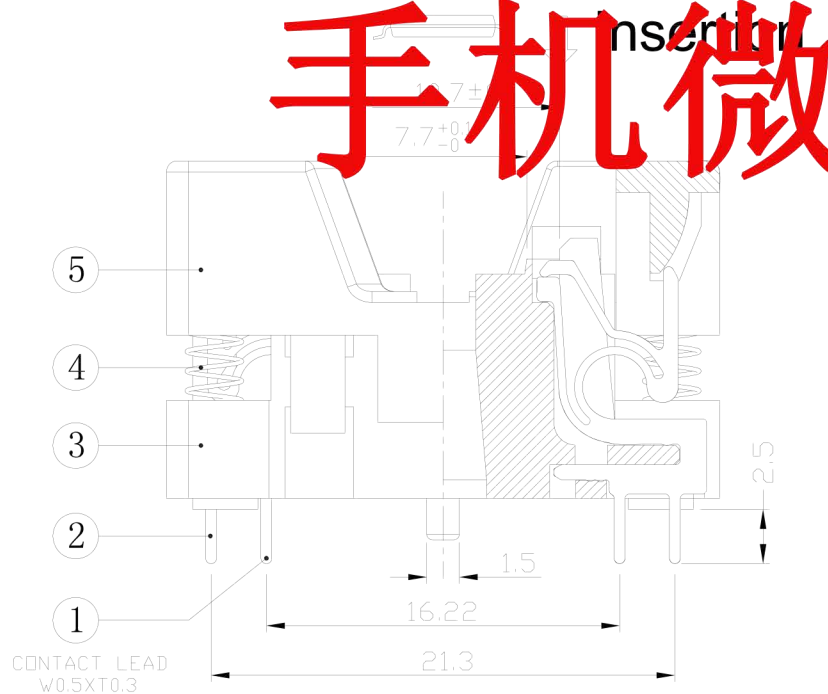


SEC.A-A
Contact Retracted

PERFORMANCE

- Insulation Resistance: 1000mΩ Min.At DC 500V
- Dielectric Withstanding Voltage For 1 Minute At AC 700V
- Contact Resistance 30mΩ MAX. at 10mA and 20mV MAX.(Initial)
- Current Rating: 1A max.
- Operation Temperature -55°C ~+125°C
- Life Span 15,000 Times (Mechanical)
- Operation Force 1.0 Kg MAX

APPL ICABLE IC

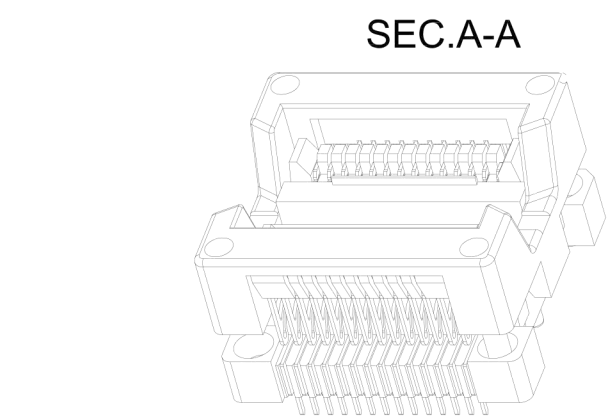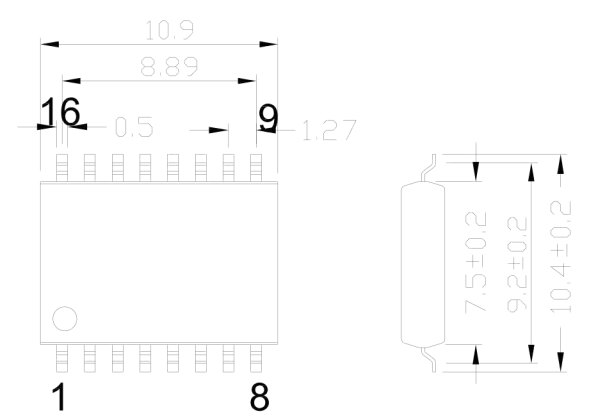

No	Part Number	Name	Material	Q/ty	Note	TOLERANCE	PROJECTION	GENERAL TOLERANCES	TITLE	
6	SOP-28-U01-003	ADAPTER	PEI/PES	1	BLACK	X. ± 0.50	DIMENSION: mm	±0.10	SOP28-1.27 SOCKET	
5	SOP-28-U01-002	COVER	PEI/PES	1	BLACK			REVA	CLASS	SOP16(28)-1.27-TP03NT
4	30-B-4515X	SPRING	SUS	4	FDR COVER			SCALE: 1:1	DRW. NO	OTS-16(28)-1.27-04
3	SOP-28-U01-001	BASE	PEI/PES	1	BLACK	X.X ± 0.25	APP:	DATE:		
2	SOP-28-MSBR-02	CONTACT	BeCu	8	Au PLATING	X.XX ± 0.10	CHECK:	DATE:		
1	SOP-28-MSBR-01	CONTACT	BeCu	8	Au PLATING	X.XXX ± 0.05	DEGK: ENG02	DATE: 20170318		