

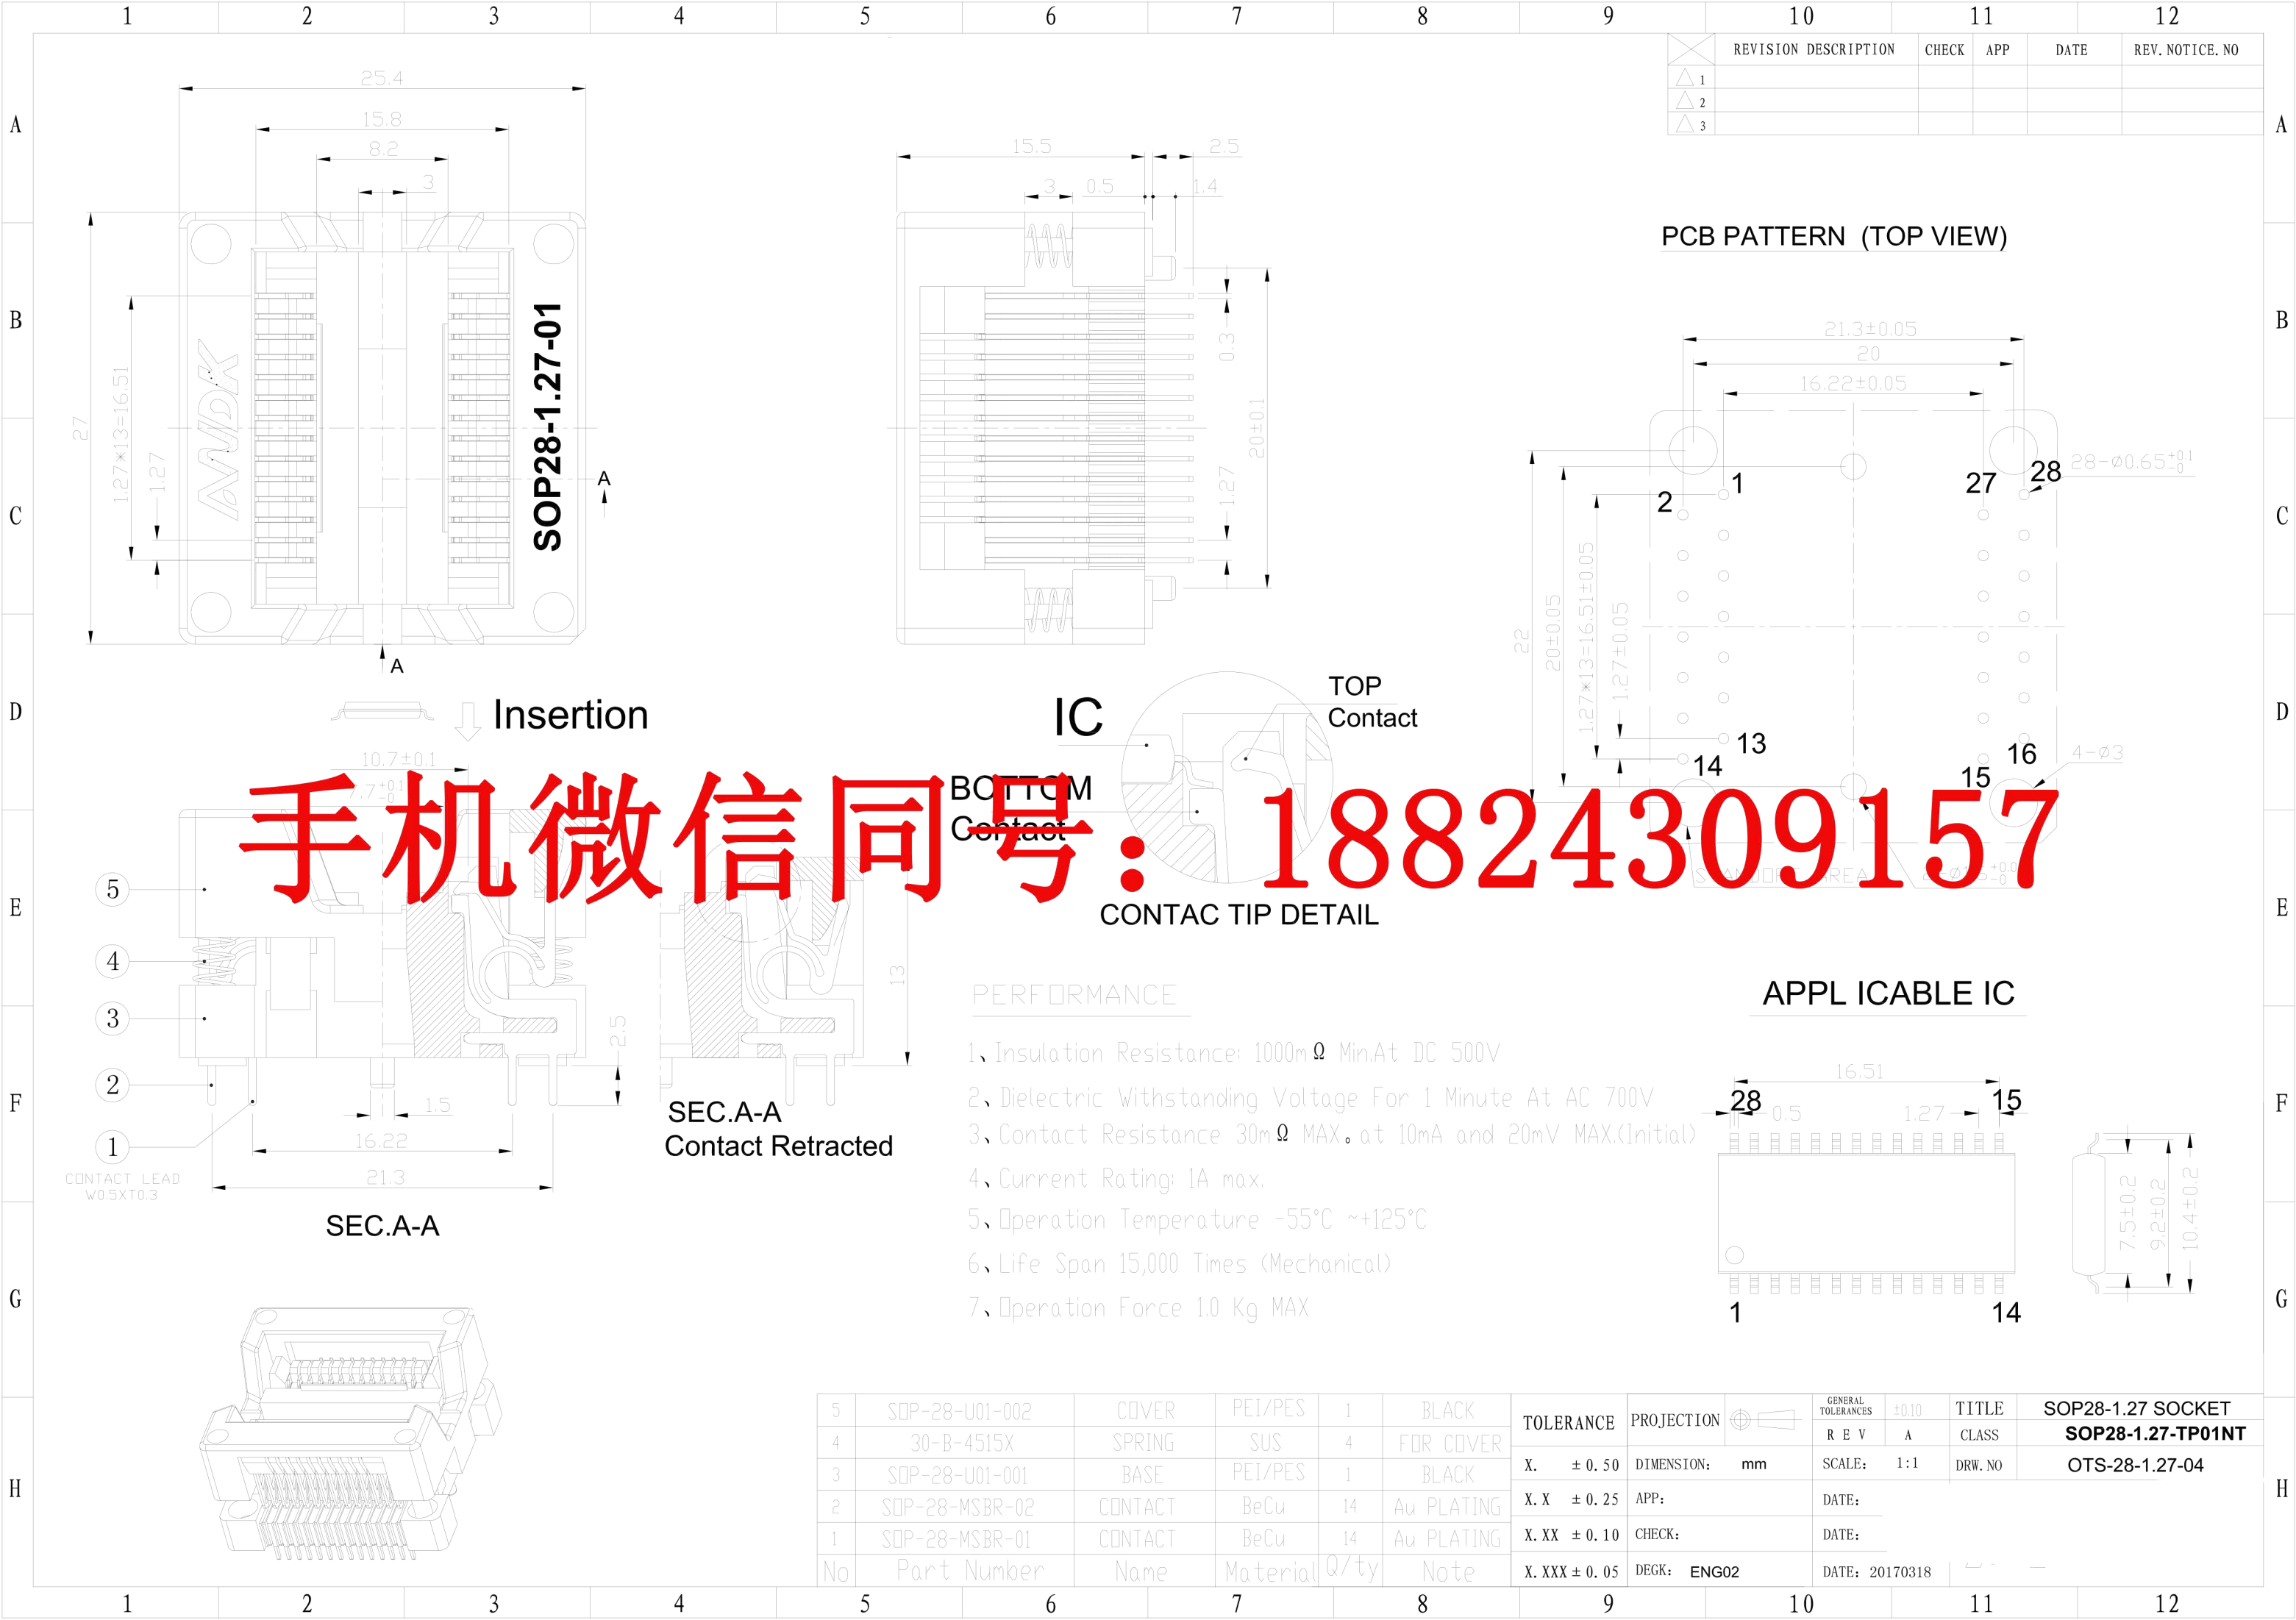


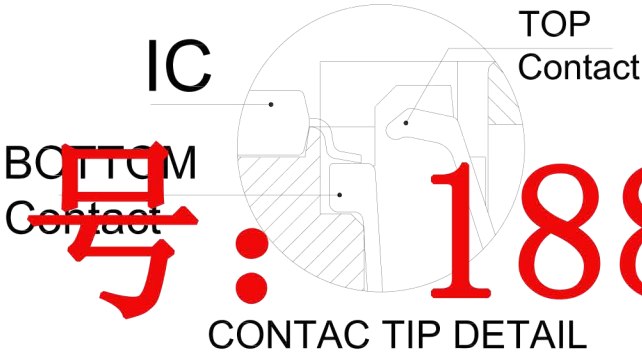

	10	11	12
REVISION	DESCRIPTION	CHECK	APP
1			
2			
3			


PCB PATTERN (TOP VIEW)

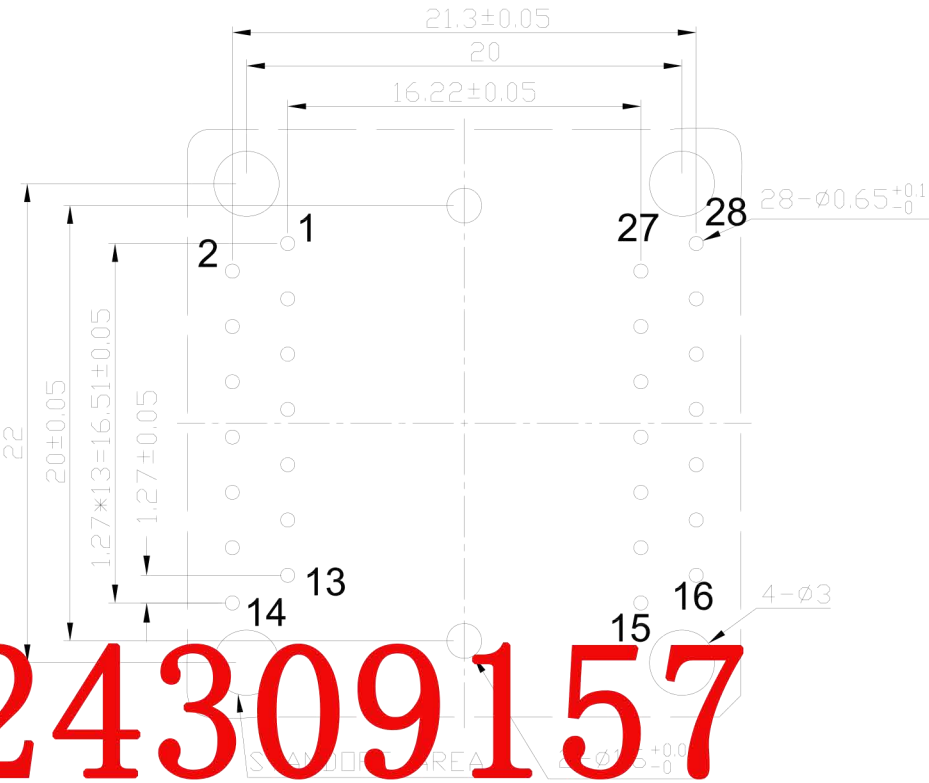

PERFORMANCE

- 1、Insulation Resistance: 1000mΩ Min. At DC 500V
- 2、Dielectric Withstanding Voltage For 1 Minute At AC 700V
- 3、Contact Resistance 30mΩ MAX. at 10mA and 20mV MAX.(Initial)
- 4、Current Rating: 1A max.
- 5、Operation Temperature -55°C ~+125°C
- 6、Life Span 15,000 Times (Mechanical)
- 7、Operation Force 1.0 Kg MAX

APPL ICABLE IC

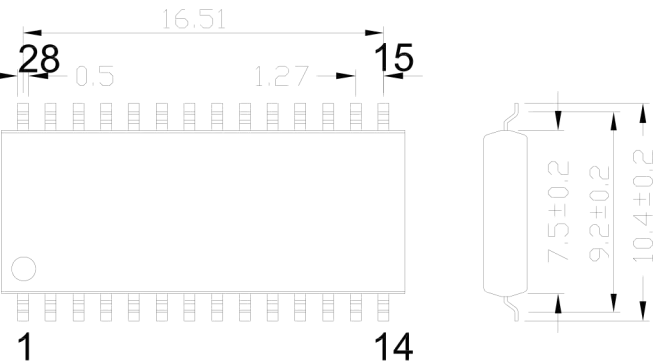

5	SOP-28-U01-002	COVER	PEI/PES	1	BLACK	TOLERANCE	PROJECTION	GENERAL TOLERANCES	±0.10	TITLE	SOP28-1.27 SOCKET
4	30-B-4515X	SPRING	SUS	4	FOR COVER	X. ± 0. 50	DIMENSION: mm	R E V	A	CLASS	SOP28-1.27-TP01NT
3	SOP-28-U01-001	BASE	PEI/PES	1	BLACK	X. X ± 0. 25	APP:	SCALE:	1:1	DRW. NO	OTS-28-1.27-04
2	SOP-28-MSBR-02	CONTACT	BeCu	14	Au PLATING	X. XX ± 0. 10	CHECK:	DATE:			
1	SOP-28-MSBR-01	CONTACT	BeCu	14	Au PLATING	X. XXX ± 0. 05	DEGK: ENG02	DATE:	20170318		
No	Part Number	Name	Material	Q/ty	Note						