

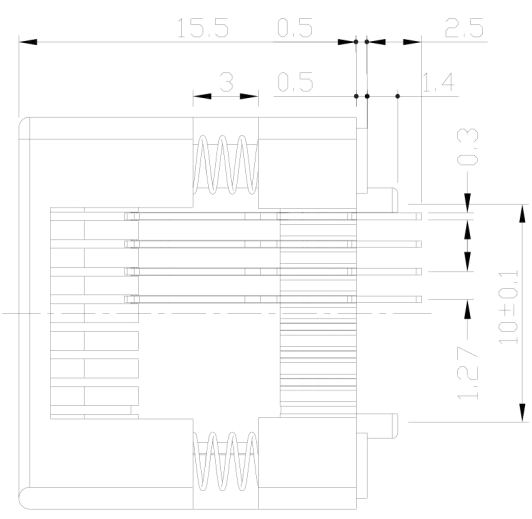



REVISION	DESCRIPTION	CHECK	APP	DATE	REV. NOTICE. NO
1					
2					
3					

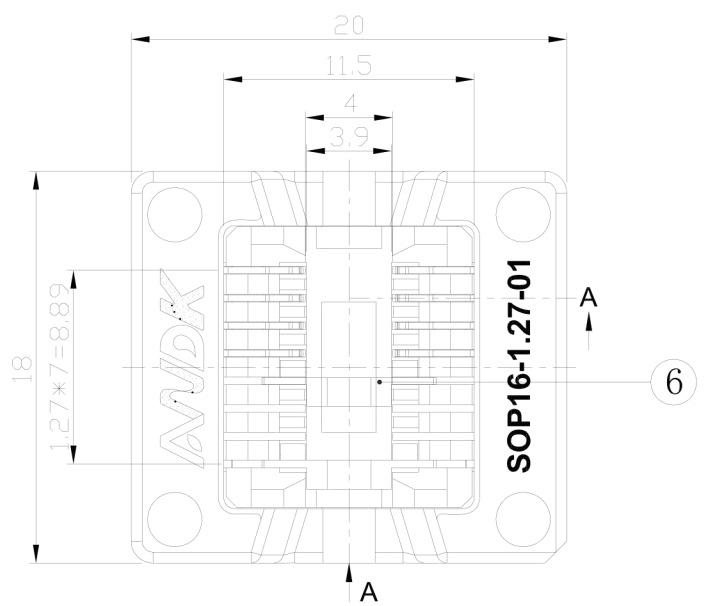

PCB PATTERN (TOP VIEW)

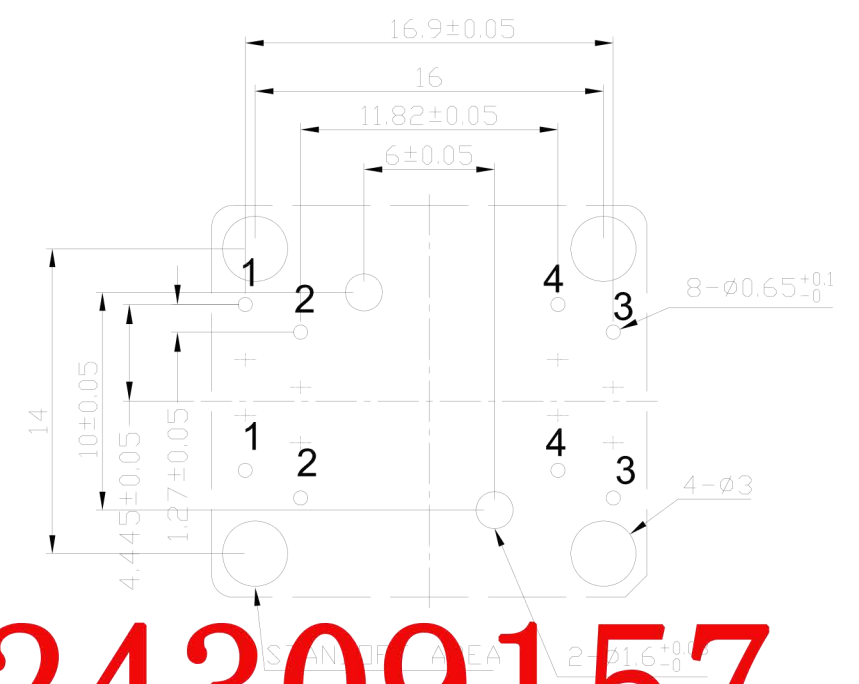

Insertion

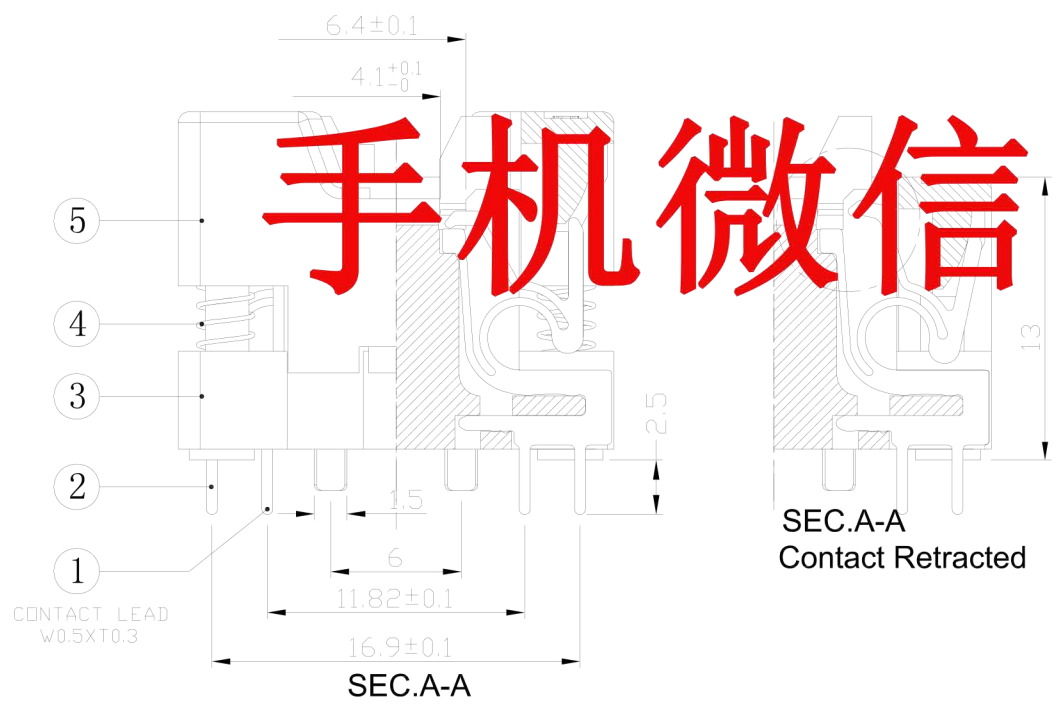


手机微信同号: 18824309157

PERFORMANCE

- 1、Insulation Resistance: 1000mΩ Min.At DC 500V
- 2、Dielectric Withstanding Voltage For 1 Minute At AC 700V
- 3、Contact Resistance 30mΩ MAX. at 10mA and 20mV MAX.(Initial)
- 4、Current Rating: 1A max.
- 5、Operation Temperature -55°C ~+125°C
- 6、Life Span 15,000 Times (Mechanical)
- 7、Operation Force 1.0 Kg MAX

APPLICABLE IC

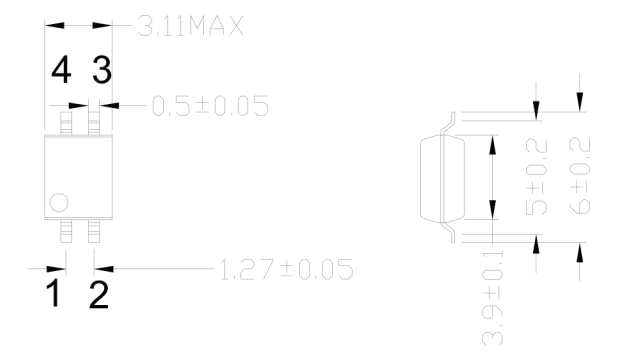

No	Part Number	Name	Material	Q/ty	Note	TOLERANCE	PROJECTION	GENERAL TOLERANCES	REV	TITLE
6	SDP-16-U01-003	ADAPTER	PEI/PES	1	BLACK	X. ± 0.50	DIMENSION: mm	±0.10	A	SOP16-1.27 SOCKET
5	SDP-16-U01-002	COVER	PEI/PES	1	BLACK	X. X ± 0.25	APP:	SCALE: 1:1		SOP4x2(16)-1.27-TP03NT
4	30-B-4515X	SPRING	SUS	4	FDR COVER	X. XX ± 0.10	CHECK:	DATE:		SDP-8/16-1.27-S02
3	SDP-16-U01-001	BASE	PEI/PES	1	BLACK	X. XXX ± 0.05	DEGK: ENG02	DATE: 20170318		
2	SDP-16-MSBR-02	CONTACT	BeCu	4	Au PLATING					
1	SDP-16-MSBR-01	CONTACT	BeCu	4	Au PLATING					

