



★印記号は改訂内容  
改訂図  
NO. 2

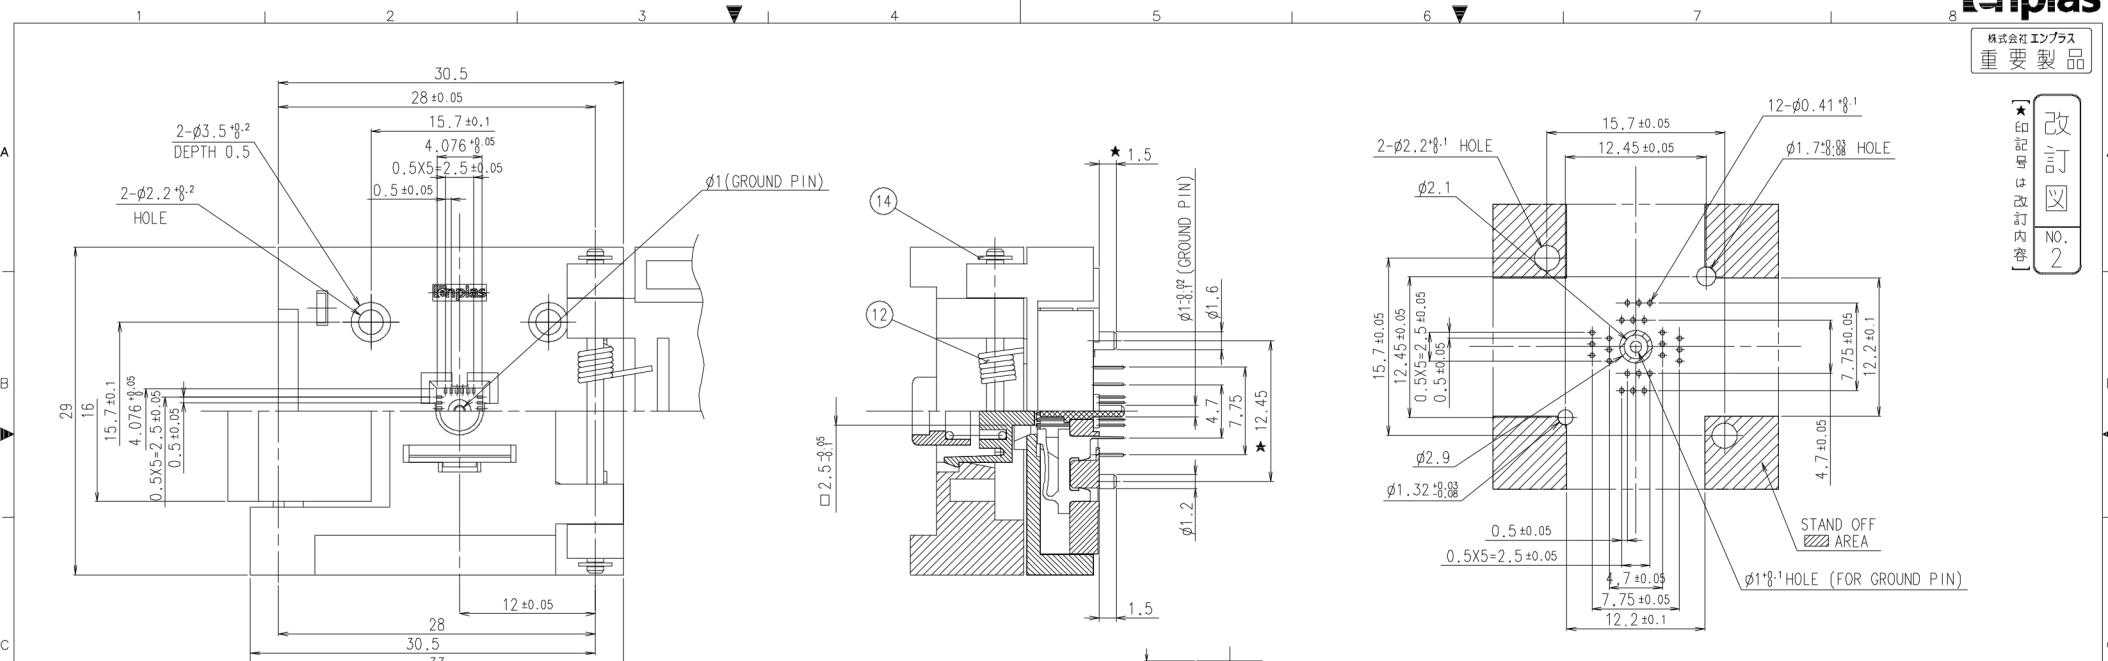

PCB PATTERN (TOP VIEW)  
S=3:1  
NOTE 1) MARK PIN POINT WITH LASER MARK.  
NOTE 2) Under the any kind of involved testing, the socket MUST be fixed on the BIB with provided screws.

手机微信同号: 18824309157

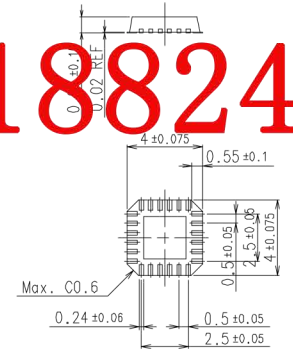

SPECIFICATION 仕様	
CONTACT RESISTANCE 接触抵抗	50mΩ or less at 10mA (INITIAL)
DIELECTRIC WITHSTANDING VOLTAGE 耐電圧	500 V.A.C for 1 minute
INSULATION RESISTANCE 絶縁抵抗	1000MΩ or more at 500V.D.C
OPERATING TEMPERATURE 使用温度	-65℃~150℃
RETENTION FORCE 耐圧力	★4.9N(0.5kgf)/kg for 1 minute
INSERTION 寿命	10000 cycle(MECHANICAL)

17	COTS	55-113-131-01	HEX. THIN NUT M2	SUS	2	SHIP WITH SOCKETS
16	COTS	55-113-111-01	SPRING LOCK WASHER 2.0	SUS	2	SHIP WITH SOCKETS
15	COTS	55-113-009-01	PAN HEAD SCREW M2X1.0	SUS	2	SHIP WITH SOCKETS
14	COTS	55-113-002-01	E-RING(φ1.2)	SUS	2	
13	QFN-16-0.5-01-11	55-111-861-01	GROUND PIN	BRASS	1	Au Plating
12	FP-28-1.27-09-003	55-112-035-01	COIL SPRING	SUS	1	FOR COVER
11	FPQ-64-1.0-01-004	55-112-007-01	COIL SPRING	SUS	1	FOR STOPPER
10	QFN-36-0.5-01-11	55-112-810-01	COIL SPRING	SUS	1	FOR PUSHER
9	QFN-68-0.5-01-10	55-111-834-01	SHAFT	SUS	1	FOR COVER
8	QFN-68-0.5-01-09	55-111-833-01	SHAFT	SUS	1	FOR STOPPER
7	FPQ-64-1.0-01-003	55-299-043-01	STOPPER	PPS	1	
6	QFN-20-0.5-01-06	56-290-912-01	PUSHER	PES	1	
5	QFN-68-0.5-01-08	56-110-743-01	FNAO CONTACT	BeCu	12	
4	QFN-68-0.5-01-07	56-110-742-01	FMZO CONTACT	BeCu	12	
3	QFN-24-0.5-01-04	56-290-895-01	GUIDE	PES	1	
2	QFN-68-0.5-01-05	56-290-835-01	COVER	PES	1	
1	QFN-24-0.5-01-01	56-290-872-01	BODY	PES	1	

ESP CONFIDENTIAL

特号 SYM.	顧客品番 CUSTOMER'S PART NO.	図番 DWG. NO.	部品名 NAME	材質 MAT'L	数量 Q'TY	備考 REMARKS
			QFN-24BT-0.5-01-00			
承認者 APPROVED BY 検査者 CHECKED BY 設計者 DESIGNED BY 2005/01/28 前年向日 DATE		承認者 H. K 検査者 設計者 2003/11/20 前年向日 ISSUED ON		公差 TOLERANCES ±0.3, ±10' 品名 NAME ★ QFN-24BT-0.5-01-00 IC SOCKET 尺度 SCALE 3 : 1 図番 DRAWING NO. 1/1		

A2-PN-SP  
A  
B  
C  
D  
E  
F  
G  
H  
I  
J  
K  
L