
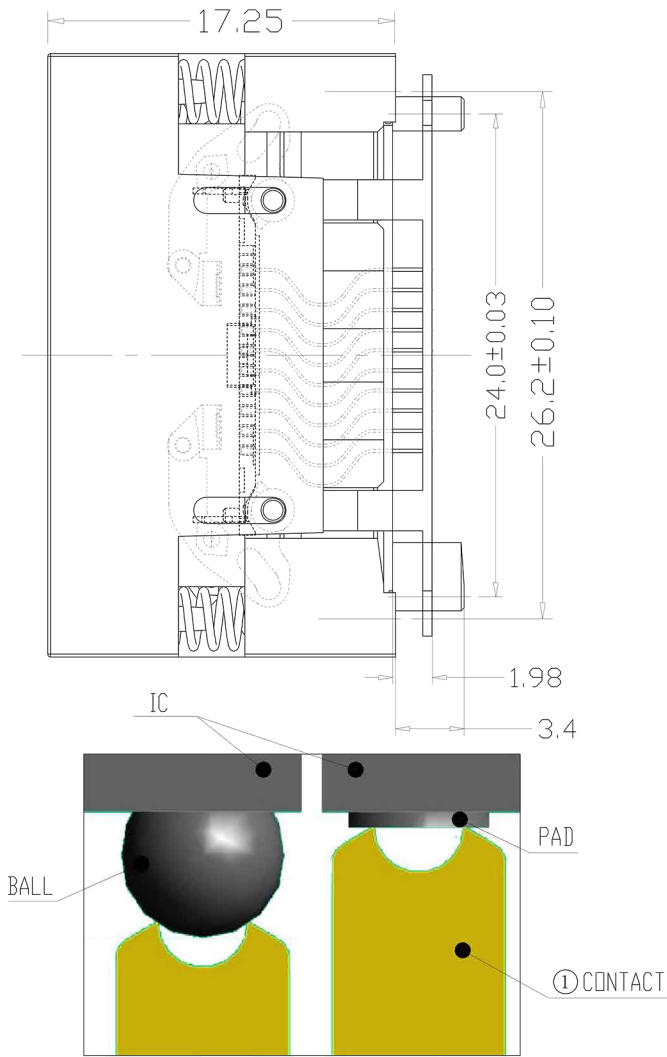


REVISION	DESCRIPTION	CHECK	APP	DATE	REV. NOTICE. NO
1					
2					
3					

PCB Pattern(TOP View)

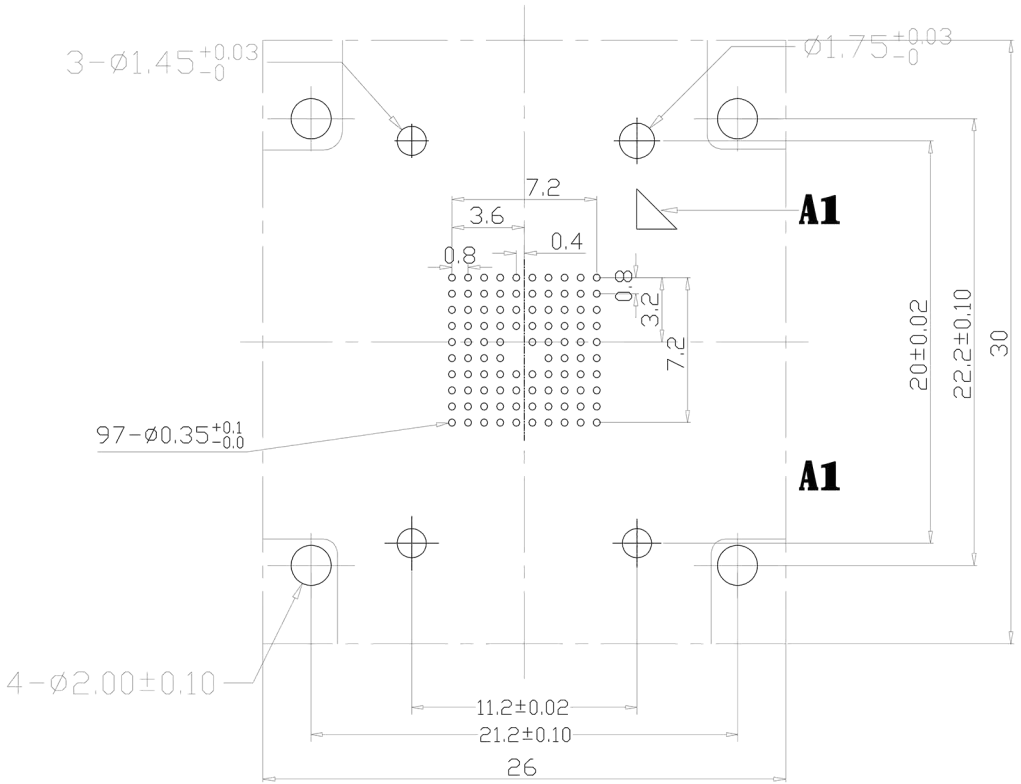

CONTACT TIP DETAIL

TOP VIEW

SIDE VIEW

BOTTOM VIEW

PERFORMANCE

1. Insulation Resistance: 1000MΩ Min. At DC 500V
2. Dielectric Withstanding Voltage For 1 Minute At AC 700V
3. Contact Resistance 30mΩ MAX. at 10mA and 20mV MAX.(Initial)
4. Current Rating: 1A max.
5. Operation Temperature -65°C ~+175°C
6. Contact Force 3-5g Per Pin (Normal)
7. Testing chips with balls of different size or superficial oxidation, even if no ball

8	310-048-D105D	IC GUIDE	PEI/PES	2	BLACK
7	310-048-C105D	SLIDER	PEI/PES	1	BLACK
6	310-048-C105D	IC HOLDER	PEI/PES	2	BLACK
5	310-048-B105D	COVER	PEI/PES	1	BLACK
4	20-B-4505B	SPRING	SUS	4	FOR COVER
3	310-048-A105D	BASE	PEI/PES	1	BLACK
2	310-048-F105D	LOCATOR	PEI/PES	3	BLACK
1	04-A-1705	CONTACT	BeCu	97	Au PLATING
No	Part Number	Name	Material	Q'ty	Note

PROJECTION		GENERAL TOLERANCES	±0.10	TITLE	BGA8001 SOCKET
		R E V	A	CLASS	007-22097D-2101
DIMENSION:	mm	SCALE:	1 : 1	DRW. NO	007-BGA-0.8-97-9X9-B-01
APP:		DATE:			
CHECK:		DATE:			
DEGK: ENG03		DATE: 20130726			