

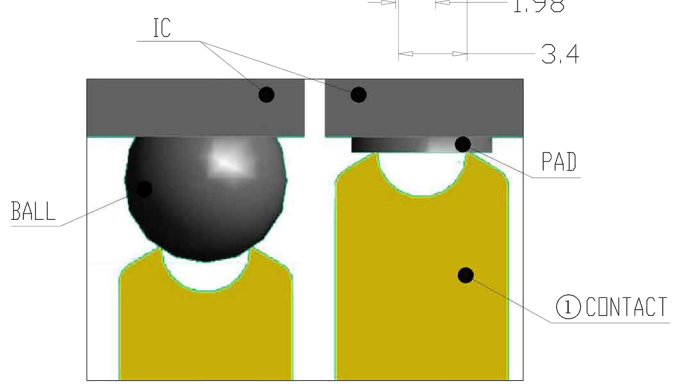
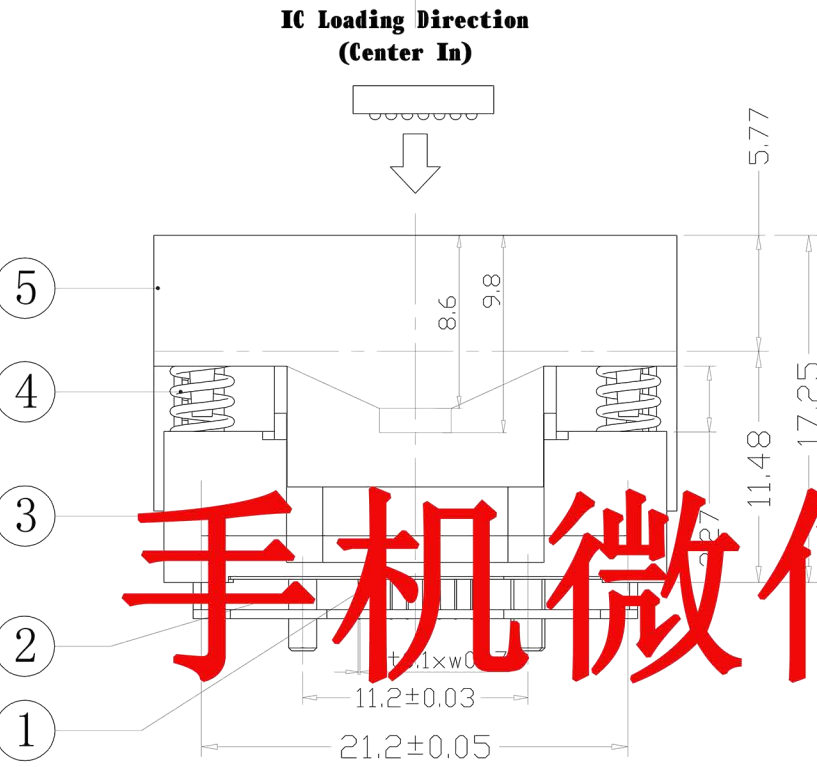
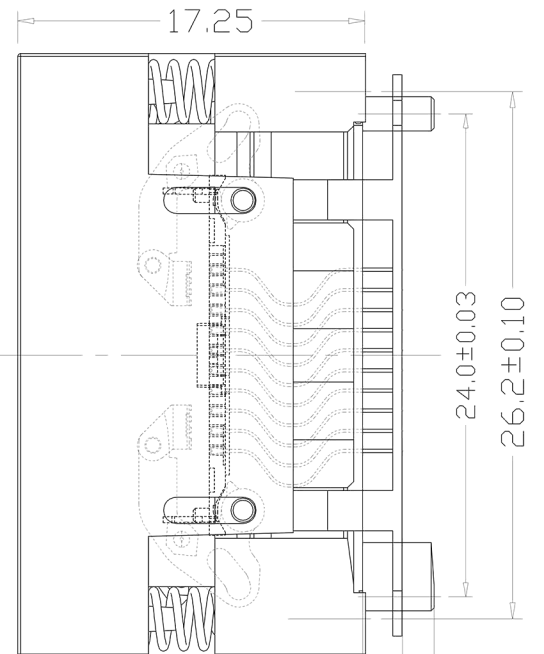



REVISION	DESCRIPTION	CHECK	APP	DATE	REV. NOTICE .NO
△ 1					
△ 2					
△ 3					

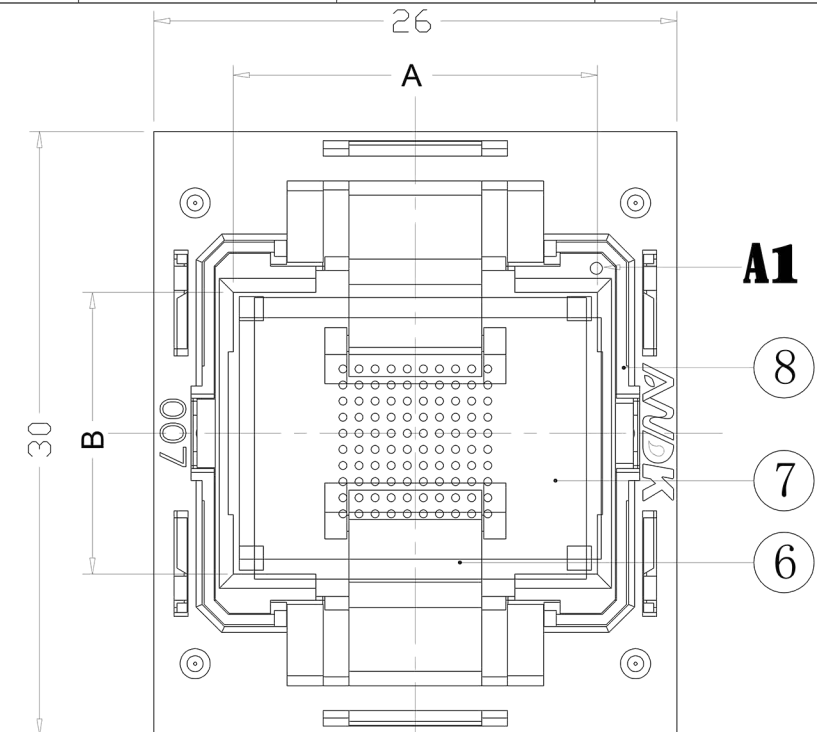

PCB Pattern(TOP View)

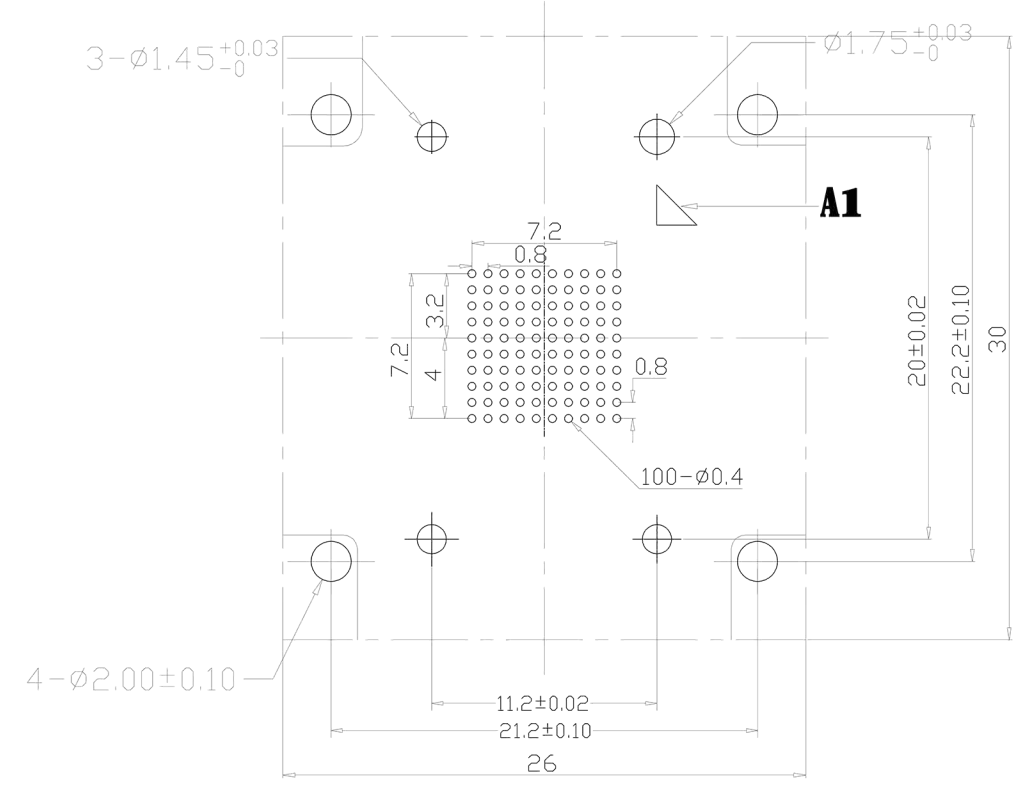

Applicable IC

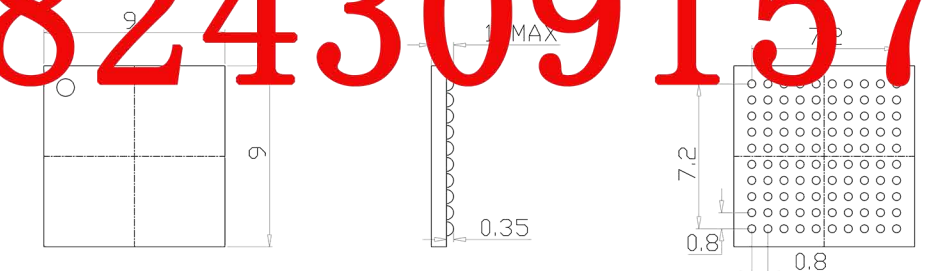

TOP VIEW SIDE VIEW BOTTOM VIEW

手机微信同号: 18824309157

PERFORMANCE

1. Insulation Resistance: 1000MΩ Min.At DC 500V
2. Dielectric Withstanding Voltage For 1 Minute At AC 700V
3. Contact Resistance 30mΩ MAX. at 10mA and 20mV MAX.(Initial)
4. Current Rating: 1A max.
5. Operation Temperature -65°C ~+175°C
6. Contact Force 3-5g Per Pin (Normal)
7. Testing chips with balls of different size or superficial oxidation,even if no ball

8	310-048-D105D	IC GUIDE	PEI/PES	2	BLACK
7	310-048-C105D	SLIDER	PEI/PES	1	BLACK
6	310-048-C105D	IC HOLDER	PEI/PES	2	BLACK
5	310-048-B105D	COVER	PEI/PES	1	BLACK
4	20-B-4505B	SPRING	SUS	4	FOR COVER
3	310-048-A105D	BASE	PEI/PES	1	BLACK
2	310-048-F105D	LOCATOR	PEI/PES	3	BLACK
1	04-A-1705	CONTACT	BeCu	100	Au PLATING
No	Part Number	Name	Material	Q/ty	Note

PROJECTION		GENERAL TOLERANCES	±0.10	TITLE	BGA100 SOCKET
		REV	A	CLASS	007-22100D-2101
DIMENSION:	mm	SCALE:	1:1	DRW. NO	007-BGA-0.8-100-9X9-D-10788
APP:		DATE:			
CHECK:		DATE:			
DEGK: ENG04		DATE: 20130621			